




PNEUMATIC ACTUATORS RACK & PINION ACT - 4000

TECHNICAL FEATURES

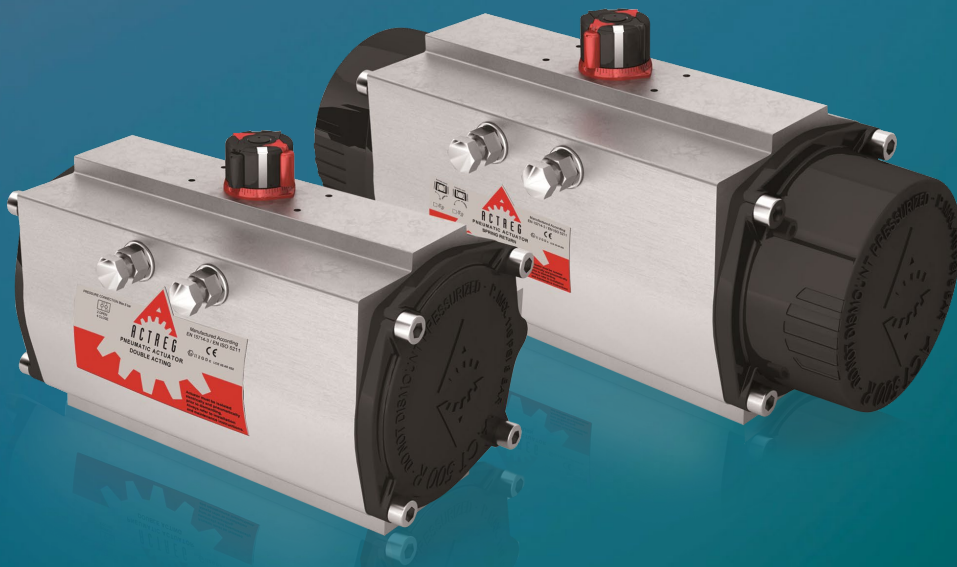

GENERAL CHARACTERISTICS

DESIGN STANDARDS	CERTIFICATES
Conformity with 2014/68/EU Pressure equipment device (PED) and 2006/42/EC European Machinery Directive	ATEX - Ex II 2 G D
Conformity with EN 15714-3 Pneumatic part-turn actuators for industrial valves	SIL Capability certification SC3
Mounting devices according to NAMUR VDI / VDE 3845 Std.	Quality certification ISO 9001 / Environmental certification ISO 14001
Valve connection according to ISO 5211	IP68 – 1.5m / 30 min.

Max. Pressure	Rotation	Screw stroke Adjustment	Piston Ø (mm)	Air Volume (L)		Stroke Time (sec) Tested at 6 bar. ASR with 14 springs.		Seals material acc. to operating temperature (°C)		
				Opening	Closing	Opening	Closing	STD (standard)	H (high temp.)	L (low temp.)
8 bar	90° ± 5°	For 1° Need ¼ Turn	340	24	22,5	ADA 3,0 ASR 4,3	ADA 3,5 ASR 5,0	NBR O-Ring (-30° to +100°)	FKM O-Ring (-15° to +150°)	Silicone O-Ring (-60° to +80°)

ACTUATOR CODIFICATION

ASR	4000	F1625	S14	FC	-	L	-	F38	-	K	-	C5	-	RALXXXX
1	2	3	4	5		6	7	8	9	10				

ACTUATOR BASIC FEATURES
1 – Acting type
ASR – Single Acting
ADA – Double Acting
2 – Actuator size:
4000 – for ASR
4000 – for ADA
3 – Flange connection
F16 – F25 acc. to ISO 5211
4 – Number of springs (only for ASR):
S06 / 08 / 10 / 12 / 14 – for ASR 4000
5 – Fail Position (only for ASR):
FC – Fail Close
FO – Fail Open

ACTUATOR OPTIONAL FEATURES
6 – Operating range temperature
Std – (-30 / 100) °C
H (high) – (-15 / 150) °C
L (low) – (-40 / 80) °C
E (extreme low) – (-60 / 80) °C
7 – Air inlet connection not standard
F38 – Air inlet 3/8" G
F12 – Air inlet 1/2" G
F34 – Air inlet 3/4" G
F1 – Air inlet 1" G
8 – Optional features (all combinable)
K – Locking device
R – Stroke regulation
U – Imperial threads
9 – Corrosive coating protection
Std – Protection C3
C4 – Protection C4
C5 – Protection C5
10 – Painting RAL
Std – End caps painted RAL 9005 / Body not painted
RALXXXX – RAL specified by the customer

DOUBLE ACTING ACTUATOR "ADA" TORQUE OUTPUT IN Nm

TYPE	Output Torque For Double Acting in Nm																		Weight (Kg)		
	3 bar		3,5 bar		4 bar		4,5 bar		5 bar		5,5 bar		6 bar		6,5 bar		7 bar			8 bar	
Pressure	0°	90°	0°	90°	0°	90°	0°	90°	0°	90°	0°	90°	0°	90°	0°	90°	0°	90°	0°	90°	
ADA	2408		2809		3210		3612		4013		4414		4816		5217		5618		6421		129,4


SPRING RETURN ACTUATOR "ASR" TORQUE OUTPUT IN Nm

TYPE	Output Torque for Spring Return in Nm																				Spring		Weight (Kg)
Pressure	3 bar		3,5 bar		4 bar		4,5 bar		5 bar		5,5 bar		6 bar		6,5 bar		7 bar		8 bar		stroke		
Position	0°	90°	0°	90°	0°	90°	0°	90°	0°	90°	0°	90°	0°	90°	0°	90°	0°	90°	0°	90°	END	START	
S06	1763	1262	2165	1663	2566	2065	2967	2466	3369	2867	3770	3269									758	1348	158,7
S08	1549	880	1950	1282	2351	1683	2752	2084	3154	2485	3555	2887	3956	3288	4358	3689	4759	4091	5068	4399	1011	1797	164,7
S10					2136	1301	2538	1702	2939	2104	3340	2505	3742	2906	4143	3307	4544	3709	4853	4017	1264	2246	170,8
S12							2323	1320	2724	1722	3125	2123	3527	2524	3928	2926	4329	3327	4638	3636	1516	2696	176,9
S14											2911	1741	3312	2142	3713	2544	4115	2945	4423	3254	1769	3145	182,9


DIMENSIONS

A	A'	B	C	D	E	F	I	R	ØS	ISO 5211	ØL	M x V	ISO 5211	ØL1	M1 x V1	ØT	X	U
940	630	434	415	213	201	16	18,6	55	72,5	F16	165	M20x30	F25	254	M16x30	200	4	60

(*) Dimensions in mm.

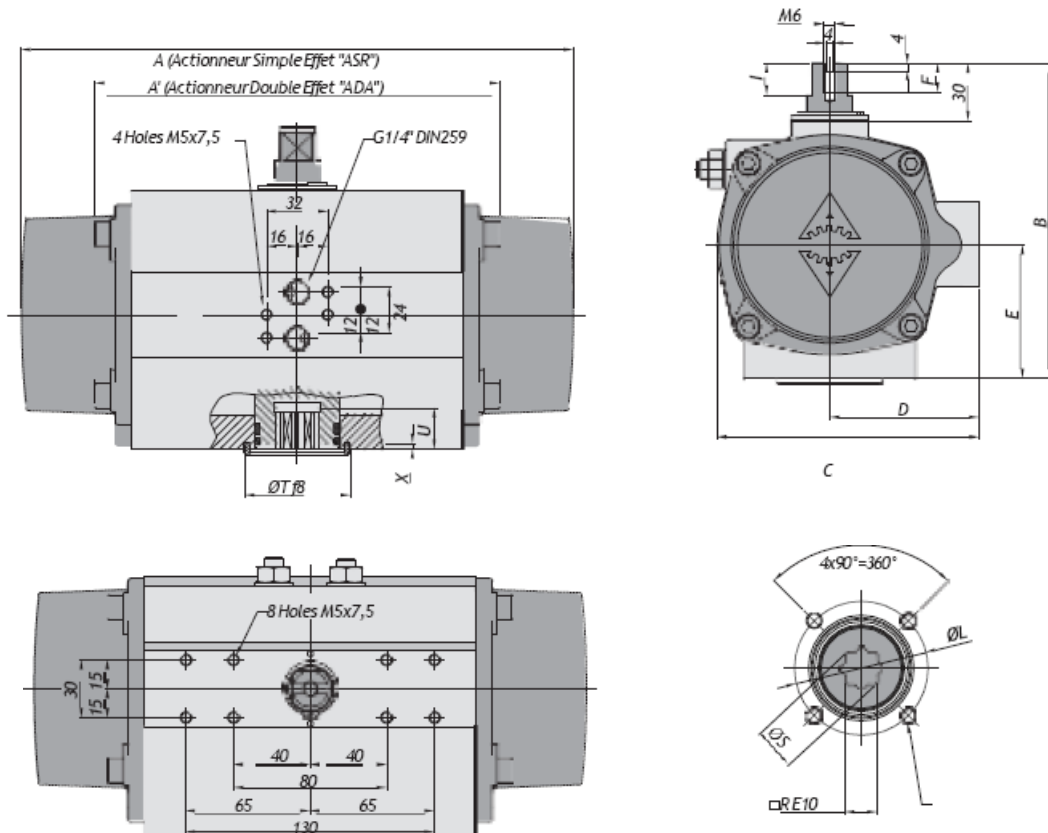


SPRING RETURN ACTUATORS (ASR)

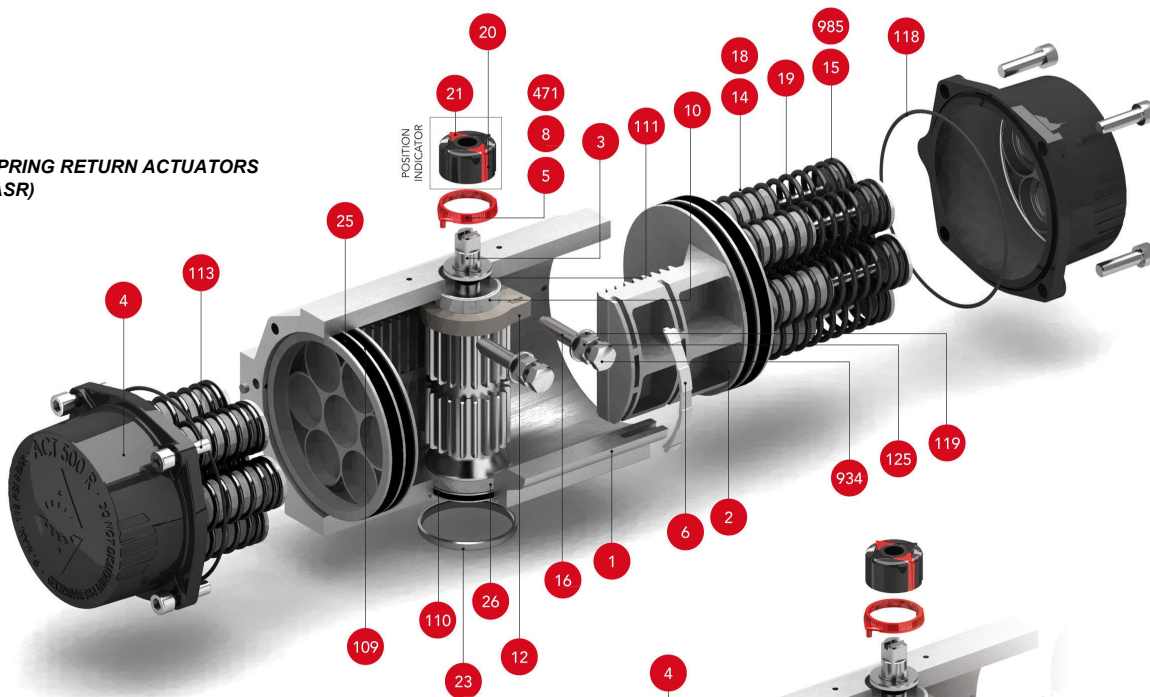

POSITION INDICATOR



DOUBLE ACTING ACTUATOR (ADA)

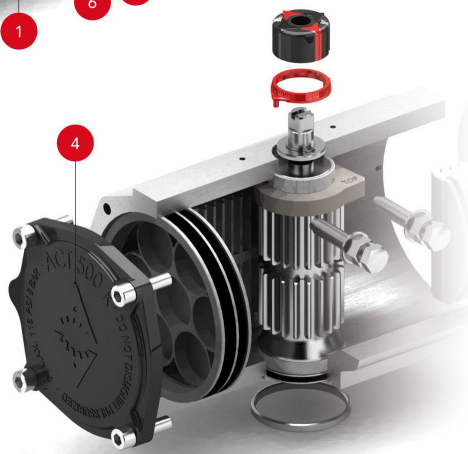

PARTS & MATERIALS

Item	Description	Material	Spare parts	Item	Description	Material	Spare parts
1	Body	Aluminium Hard Anodized	-	23	Centering Ring	Nickel Plated Carbon Steel	-
2	Piston	Aluminium	-	24	Plug Air Stop	NBR / FKM / Silicone	2
3	Pinion	Nickel Plated Carbon Steel	-	25	Slide Guide	Polyamide PA 6.6 + 30% G.F.	2
4	End Caps	Aluminium Epoxy Coated	-	26	Lower Pinion Bearing	Hostalen RCH 1000	1
5	Soft Pinion Washer	Polyamide PA 6.6	1	109	O-Ring – Piston	NBR / FKM / Silicone	2
6	Slide piston	Polyamide PA 6.6 + 30% G.F.	2	110	O-Ring – Base pinion	NBR / FKM / Silicone	1
8	Pinion Washer	Stainless Steel	-	111	O-Ring – Top pinion	NBR / FKM / Silicone	1
10	Upper Pinion Bearing	Hostalen RCH 1000	1	113	Bolt	Stainless Steel	-
12	Stop	ASTM A-105	-	118	O-Ring – End cap	NBR / FKM / Silicone	2
14	(*) Spring Long Support	Polyamide PA 6.6	-	119	O-Ring – Adjusting screw	NBR / FKM / Silicone	2
15	(*) Spring Short Support	Polyamide PA 6.6	-	125	Washer	Stainless Steel	-
16	Leveling Screw	Stainless Steel	-	913	Set Screw	Stainless Steel	-
18	(*) Bolt	Stainless Steel	-	471	External Circlip	Stainless Steel	1
19	(*) Spring	DIN 2076 -D-5.6	-	934	Nut	Stainless Steel	-
20	Position Indicator	Polyamide	-	985	(*) Nut	Stainless Steel	-
21	Cam	Polyamide	-				

(*) Only for ASR series.



Corrosive protection

Corrosive protection acc. to ISO 12944-5.

Optional features (all combinable)

Locking device

Stroke Regulation

Imperial threads

Accessories

Limit switch Box (Atex Ia / EX d)

Declutchable Gear Operator (DG)

Custom features

Other options available upon request. Please contact Actreg



For further information visit our website
www.actreg.com



ACTREG S.A.U. (headquarters)

Carrer de l'Energia 15-25, naves 1 y 2
 Pol. Industrial Barnasud
 08850 Gavà
 Barcelona (Spain)
 Phone +34 936 614 410
actreg@actreg.com

ACTREG do Brasil, Sorocaba (SP)

Avenida Liberdade, 4565
 Barrio Iporanga - Sorocaba - SP
 CEP 18.087-170
 Sao Paulo, Brasil
 Phone 0055 15 3228 1010
actreg@actregdobrasil.com.br

ACTREG Shanghai Actuator Co., Ltd.

No. 125 Ji Ye Road
 She Shan Industrial Zone
 Songjiang District, Shanghai, China
 P.R.C. 201602
 Phone +86 21 57796818
sale@actreg.net.cn

ACTREG UK, LTD

Units 2 & 3 Henson Close
 Telford Way Industrial Estate
 Kettering Northants NN 16 8PZ
 United Kingdom
 Phone 0044 1536412525
sale@actreg.co.uk

ACTREG North America

20675 Boul. Industrial
 Ste. Anne-de-Bellevue, Quebec
 H9X 4B2 Canada
 Toll Free: 1 800 667 4819
 Phone 001514 457 5777
truline.sales@truline.ca